


12

Office & Kitchen

Pages 311-318

T5 | T8 | SMD LED

Die cast | Aluminium | Steel | Plastic






T5 Linkable
Plastic



B-A**

38135A | 35W | T5 | Diffuser | Plastic

IP20
offer



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	⊞	Notes
38135A/W	White	Warm white	3000K	35W	230V	□	30	Includes warm white lamp, power supply cable, corner cable, connector

The LED T8 Linear Fittings



A-A+ 38236D/W


IP20

38236D | 2xT8 LED 120cm | Steel

Diffuser / louver must be ordered separately



38236D/G

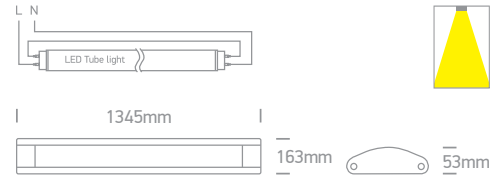


A-A+ 38258D

IP20

38258D | 2xT8 LED 150cm | Steel

Diffuser / louver must be ordered separately

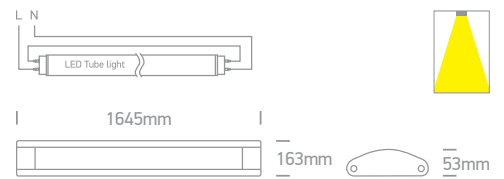

38236DL | Louver for 38236D & 38258D | 30cm | Plastic



For 38236D order 4pcs
For 38258D order 5pcs



38236DF | Diffuser for 38236D | 120cm



38258DF | Diffuser for 38258D | 150cm



Order Code	Colour	Input	Class		Notes
38236D/W	White	100-240V		6	Only suitable for T8 LED tubes
38236D/G	Grey	100-240V		6	Only suitable for T8 LED tubes
38258D/G	Grey	100-240V		6	Only suitable for T8 LED tubes



The LED Linear Range



38225M | 25W | SMD 2835 | Aluminium + Plastic




Optional suspension kit.
Order code 050090.

27mm



A-A

IP20

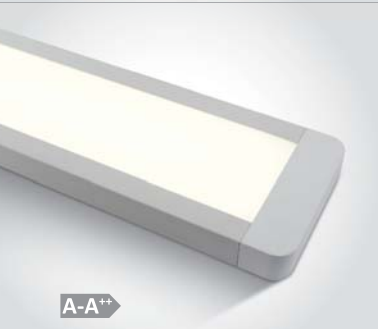


38248M | 48W | SMD 2835 | Aluminium + Plastic



Optional suspension kit.
Order code 050090.


27mm



A-A

IP20


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38225M/W/C	White	Cool white	4000K	25W	2200lm	230V	□	8	Complete with driver
38225M/W/W	White	Warm white	3000K	25W	2100lm	230V	□	8	Complete with driver
38248M/W/C	White	Cool white	4000K	48W	4300lm	230V	□	8	Complete with driver
38248M/W/W	White	Warm white	3000K	48W	4200lm	230V	□	8	Complete with driver

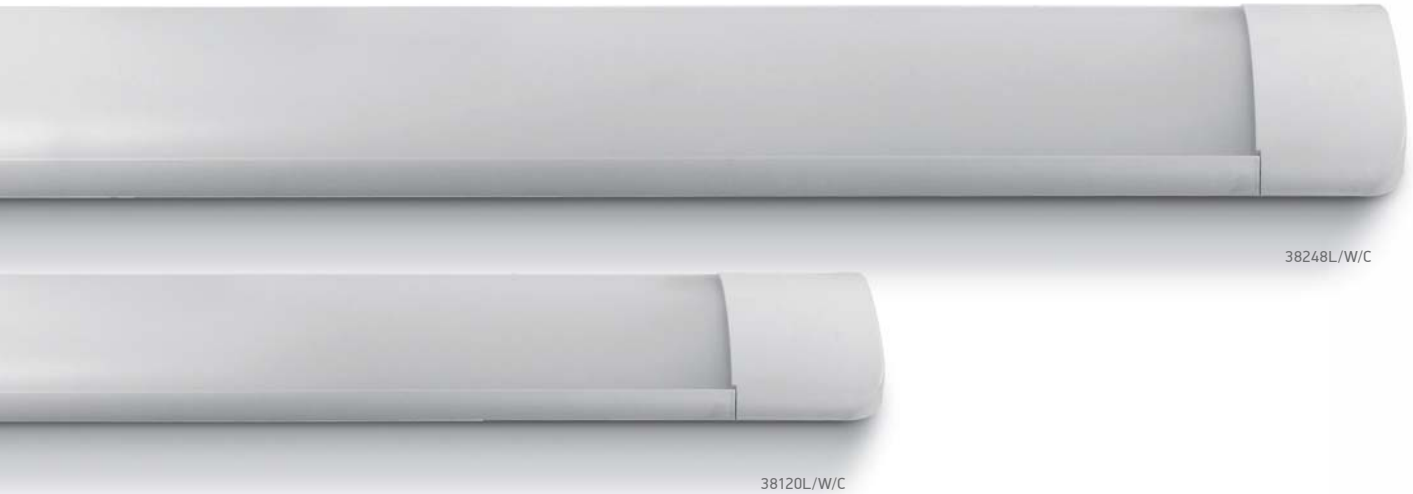

38248L/W/C

38120L/W/C

The LED Linear Range

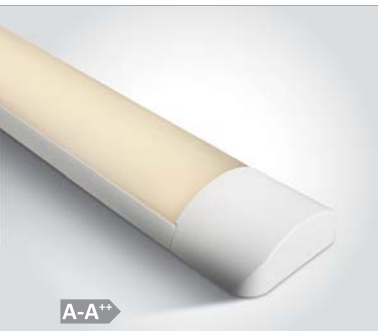



A-A⁺⁺

IP20

38120L | 20W | SMD 2835 | Aluminium + PC



Optional suspension kit.
Order code 050090.

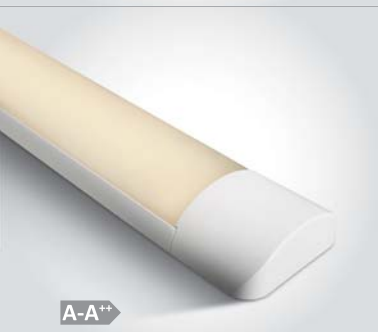


A-A⁺⁺

IP20

38135L | 35W | SMD 2835 | Aluminium + PC



Optional suspension kit.
Order code 050090.




A-A⁺⁺

IP20

38248L | 48W | SMD 2835 | Aluminium + PC



Optional suspension kit.
Order code 050090.

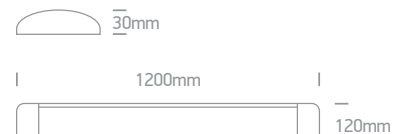

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38120L/W/C	White	Cool white	4000K	20W	1800lm	230V		12	Complete with driver
38120L/W/W	White	Warm white	3000K	20W	1700lm	230V		12	Complete with driver
38135L/W/C	White	Cool white	4000K	35W	3100lm	230V		12	Complete with driver
38135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with driver
38248L/W/C	White	Cool white	4000K	48W	4300lm	230V		12	Complete with driver
38248L/W/W	White	Warm white	3000K	48W	4200lm	230V		12	Complete with driver

LED Linear Profiles



38150C/B/C

38150A/B/C



A-A+ 38150A/W/C

38150A | 40W | LED | Linear system | Diffuser | Aluminium



80 CRI **CE** 3 YEAR

UGR19


new
IP20



38150A/B/C



Complete with
4 Fixing clips
& 4 connectors.



38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU & 38150C




new
IP20



38150E/B



Complete with
4 Fixing clips
& 4 connectors.



050170C/W


050170C | Corner for 38150A, 38150B, 38150BU & 38150C



new
IP20



050170C/B




050170 | 3m Suspension kit for 38150A, 38150B, 38150BU & 38150C



new



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150A/W/C	White	Cool white	4000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver
38150A/W/W	White	Warm white	3000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver
38150A/B/C	Black	Cool white	4000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver
38150A/B/W	Black	Warm white	3000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver

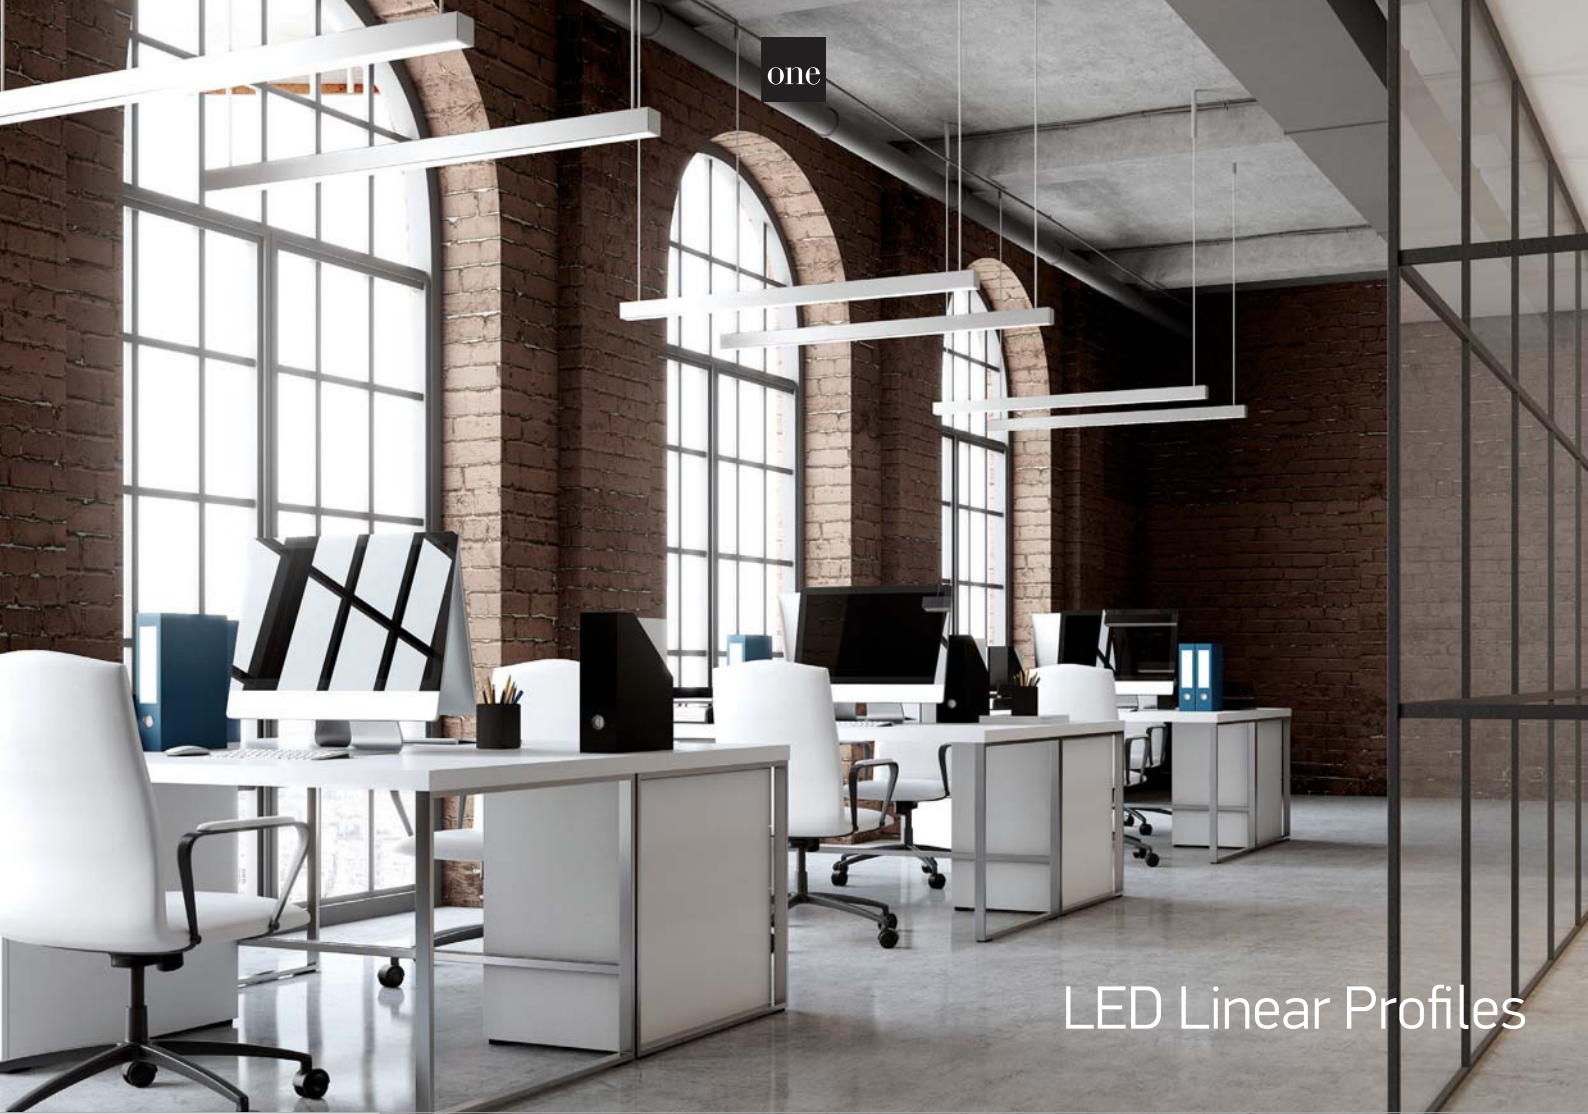

LED Linear Profiles



A-A⁺ 38150B/W/C

38150B | 40W | 48LEDs | Linear system | Aluminium










UGR17



38150B/B/C








Complete with 4 Fixing clips & 4 connectors.



A-A⁺ 38150C/W/C

38150C | 40W | 24LEDs + Diffuser | Linear system | Aluminium




UGR19













38150C/B/C



Complete with 4 Fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150B/W/C	White	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/W/W	White	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/C	Black	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/W	Black	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150C/W/C	White	Cool white	4000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver
38150C/W/W	White	Warm white	3000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver
38150C/B/C	Black	Cool white	4000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver
38150C/B/W	Black	Warm white	3000K	40W	3400lm	120°	230V		300cm	12	Complete with 1000mA driver



LED Linear Profiles



A-A+ 38150BU/W/C

38150BU | 40W + 20W Uplight | 48LEDs + Diffuser | Linear system | Aluminium

new
DARK LIGHT
IP20

80 CRI
CE
LED BUILT IN
3 YEAR
UGR17



38150BU/B/C



Complete with 4 Fixing clips & 4 connectors.



38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU & 38150C

new
IP20


CE



38150E/B



Complete with 4 Fixing clips & 4 connectors.



050170C/W


050170C | Corner for 38150A, 38150B, 38150BU & 38150C

new
IP20

CE



050170C/B



050170 | 3m Suspension kit for 38150A, 38150B, 38150BU & 38150C

new

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	📦	Notes
38150BU/W/C	White	Cool white	4000K	40W/20W	3800lm/1800lm	34°/120°	230V	Ⓢ	300cm	12	Complete with 1000mA + 500mA drivers
38150BU/W/W	White	Warm white	3000K	40W/20W	3800lm/1800lm	34°/120°	230V	Ⓢ	300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/C	Black	Cool white	4000K	40W/20W	3800lm/1800lm	34°/120°	230V	Ⓢ	300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/W	Black	Warm white	3000K	40W/20W	3800lm/1800lm	34°/120°	230V	Ⓢ	300cm	12	Complete with 1000mA + 500mA drivers

one

T5 Suspended Linear






38154A | 54W | T5 | Aluminium



IP20

offer

A-A++

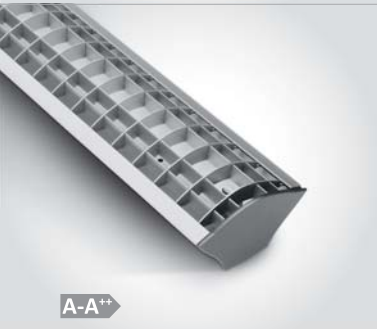

38154M | 54W | T5 | Aluminium







DARK LIGHT

IP20

offer

A-A++



Order Code	Colour	Watts	Input	Class		Notes
38154A/G	Grey	54W	230V		6	Complete with electronic ballast
38154M/G	Grey	54W	230V		6	Complete with electronic ballast